



## DF66 - Lincat Silverlink 600 Electric Counter-top Twin Tank Fryer - 2 Baskets - W 600 mm - 2 x 3.0 kW

The Silverlink 600 Electric Twin Tank Counter Top Fryer has two independently operated fryer tanks for greater versatility, combined with a power that can deliver 24kg of chips per hour.

- ✓ Two independently operated fryer tanks for greater versatility, delivering 24kg of chips per hour
- ✓ Front mounted controls for safety
- ✓ Hinged elements to give easy access during cleaning
- ✓ Cool zone collects cooking debris - gives cleaner cooking results and saves money by prolonging the life of the oil
- ✓ Thermostatically controlled to give accurate cooking temperatures throughout cooking. Fail-safe top temperature cut out ensures safe operation.
- ✓ Fully moulded 304 stainless steel tank and heavy duty nickel plated baskets for the most demanding of operations
- ✓ Front drain off tap for easy removal of cooking oil
- ✓ Supplied with two cables and two plugs for easy installation

### Specifications

#### Summary

|                      |                                   |
|----------------------|-----------------------------------|
| Brand                | Lincat                            |
| Range                | Silverlink 600                    |
| Power Type           | Electric                          |
| Unit Type            | Counter-top                       |
| Available in UK Only | No                                |
| UK Warranty          | 2 Years Parts and Labour Warranty |
| Export Warranty      | Contact your local dealer         |
| GTIN                 | 5056105100034                     |

#### Power and Performance

|                      |            |
|----------------------|------------|
| Total Power kW       | 2 x 3.0    |
| Temperature Range °C | 130-190    |
| IP Rating            | IP33       |
| Temperature Control  | Mechanical |

#### Key Specifications

|                    |               |
|--------------------|---------------|
| Number of Baskets  | 2             |
| Number of Tanks    | 2             |
| Gravity Filtration | No            |
| Pumped Filtration  | No            |
| Drain Location     | Front-mounted |

#### Capacity

|                         |                                                     |
|-------------------------|-----------------------------------------------------|
| Product Output per Hour | 16kg chips - 12mm [frozen], 24kg chips - 12mm [chi] |
| Capacity Litres         | 2 x 9.0                                             |

#### Weights and Dimensions

|                           |     |
|---------------------------|-----|
| Unit Height (External) mm | 330 |
| Unit Width (External) mm  | 600 |
| Unit Depth (External) mm  | 600 |
| Net Weight Kg             | 22  |

#### Supply Connections

|                                |           |
|--------------------------------|-----------|
| Requires Installation          | No        |
| Requires Electrical Supply     | Yes       |
| UK 3 Pin Plug                  | Yes       |
| Requires Hardwiring            | No        |
| Electrical Supply Rating Watts | 2 x 3,000 |
| Single Phase Amps              | 2 x 13.0  |
| Single Phase Voltage           | 230       |





#### Shipping

|                  |      |
|------------------|------|
| Packed Weight Kg | 25.6 |
| Packed Height cm | 49.5 |
| Packed Width cm  | 70   |
| Packed Depth cm  | 70   |

### Available Accessories

|             |                                                                                             |
|-------------|---------------------------------------------------------------------------------------------|
| <b>BA96</b> | BASKET SPUN DFSMALL                                                                         |
| <b>CC6</b>  | Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal with Doors - W 600 mm         |
| <b>CN6</b>  | Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal without Doors - W 600 mm      |
| <b>HC6</b>  | Lincat Silverlink 600 Free-standing Heated Open-Top Pedestal with Doors - W 600 mm - 0.5 kW |
| <b>HCL6</b> | Lincat Silverlink 600 Free-standing Heated Pedestal with Legs and Doors - W 600 mm - 0.5 kW |
| <b>SLS6</b> | Lincat Silverlink 600 Free-standing Floor Stand - for units W 600 mm                        |

### Technical Picture

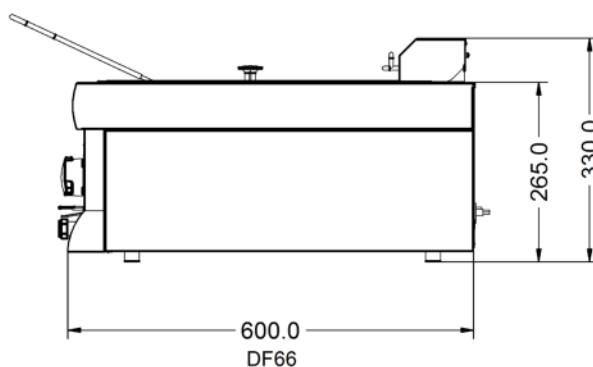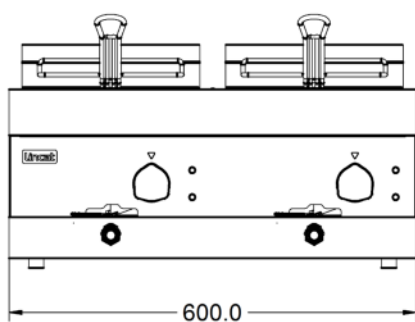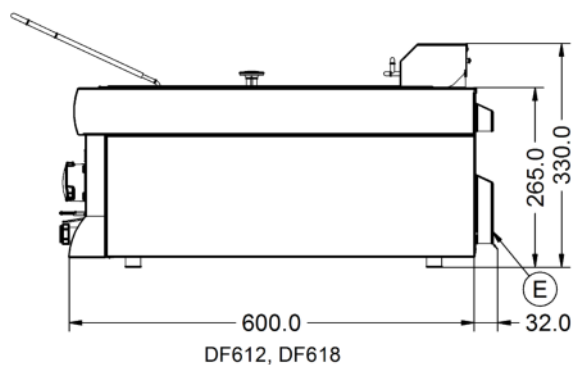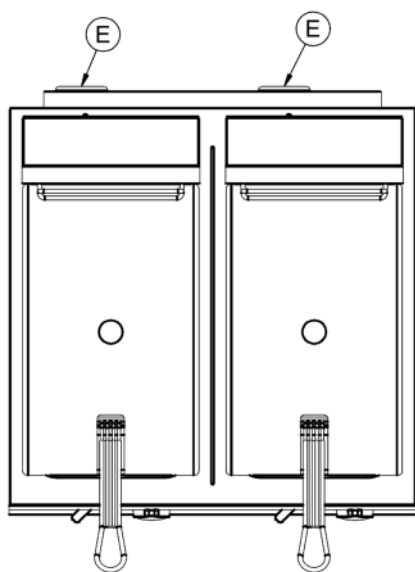



#### Lincat Limited

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



#### Customer Care

**Tel:** +44 1522 875500  
**Email:** [care@lincat.co.uk](mailto:care@lincat.co.uk)

#### Export Customers

**Tel:** +44 1522 503250  
**Email:** [export@lincat.co.uk](mailto:export@lincat.co.uk)

#### Opening Hours

**Monday – Friday:**  
8.30am – 5pm