




Demand more. Choose Foster

EcoPro G2 600 Litre Upright Refrigerated Cabinet EP700H



Temperature



Refrigerator +1/+4 °C

Dimensions (mm)

W 700 D 820

H 2080



Capacity

600 Litres

Weight

Unpacked: 121 KG Packed: 133 KG

Features & Benefits

We've revolutionised professional refrigeration... again. Built from the ground up to include over 50 new features and innovations, the EcoPro G2 is loaded with new design, quality, reliability, efficiency and performance features.

- All new thicker and more robust cabinet design with advanced thermal efficiency and market leading capacity making your money go further
- New 'smartphone style' touch sensitive hidden-until-lit control panel with unique high visibility temperature display combines sophistication with functionality
- All-new ergonomic door and handle design for ease of opening and cleaning
- Designed using high technology: 'Fluid Food-Fresh Dynamics' modelling, the new and improved advanced Foster Circularair II air distribution system maximises efficient operation even when shelves are fully loaded
- Brand-new refrigeration system designed to be the most technologically advanced and energy efficient yet

External Finish	
304 Stainless Steel	Option
Stainless Steel	Standard
304 Stainless Steel Rear For Island Siting	Option

Internal Finish	
304 Stainless Steel	Option
Aluminium	Standard

Shelving	
GN 2/1 Shelf	Quantity: 3 Standard
Additional Shelf	Option

Base Fittings	
80mm Castors	Standard
150mm Legs	Option

Doors	
Solid Full	Standard
Solid Half	Option
Hinged - Right Hand	Standard
Hinged - Left Hand	Option
Pass Through	Option
Glass with Lights	Option

Refrigeration	
Forced Air	Standard
Integral	Standard
R290 (Hydrocarbon)	Standard
R134a	Option
Drain Required?	No


Electrical, Energy and Service Information	
230 Volts	Standard
50Hz	Standard
60Hz	Option
1 Phase	Standard
Running Watts	260
Running Amps	1.8
Thermal Heat Rejection (W)	270
Noise (dBa @ 1m)	68.6
Fuse Required (A)	10 amp
Refrigerant charge	0.11
Global Warming Potential	3
Energy Efficiency Index	31.95

Product Extras	
Helicoil Mains Lead	Option
Door Pull Handle	Option
Marine Kit	Option

Footnotes

- Marine kit option includes legs, bulkhead brackets, marine shelves & latch handle
- Hydrocarbon option not available on glass door models
- 32oC ambient on glass door refrigerator model
- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

Energy Performance Data and information

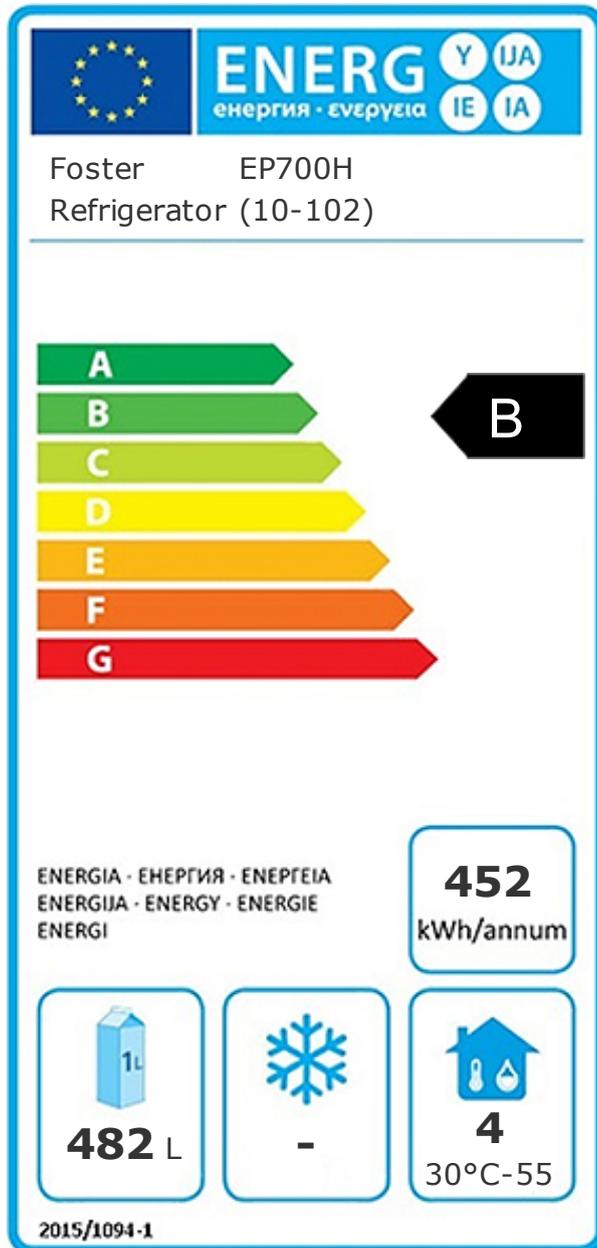

Application

This appliance is intended for use in ambient temperatures up to 40²⁰°C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit www.fosterrefrigerator.co.uk/Foster-OurPolicies.asp