

# Refrigeration & Freezer Counters HD Series

## Features

- Side mounted compressor units
- High Grade Stainless Steel Construction Interior and Exterior
- Hydrocarbon Gas – R290HC or R600a
- Heavy duty Embraco compressor
- Self-closing and stay open door
- Recessed door handle
- Magnetic door gaskets
- Pre-installed castors
- Pre-installed shelves
- Bridging shelf between each door section
- Good for the harshest of environments



Product Code	Refrigerator
EPF3422HD	2 Door Refrigerator
EPF3422HDSB	2 Door Refrigerator – with Splash Back
EPF3432HD	3 Door Refrigerator
EPF3432HDSB	3 Door Refrigerator – with Splash Back
EPF3442HD	4 Door Refrigerator
EPF3442HDSB	4 Door Refrigerator – with Splash Back

Product Code	Freezer
EPF3462HD	2 Door Freezer
EPF3462HDSB	2 Door Freezer – with Splash Back
EPF3472HD	3 Door Freezer
EPF3472HDSB	3 Door Freezer – with Splash Back
EPF3482HD	4 Door Freezer
EPF3482HDSB	4 Door Freezer – with Splash Back



## Optional Extras



Code	Description
EPF3906	REPLACE ONE DOOR FOR 2 HALF DRAWERS
EPF3908	REPLACE ONE DOOR FOR 1 THIRD & 1 TWO THIRD DRAWERS
EPF3907	REPLACE ONE DOOR FOR 3 THIRD DRAWERS
EPF900H	900mm Height

# Refrigeration & Freezer Counters HD Series

Counters

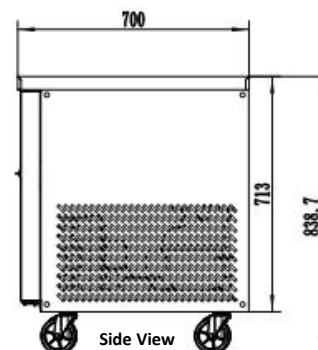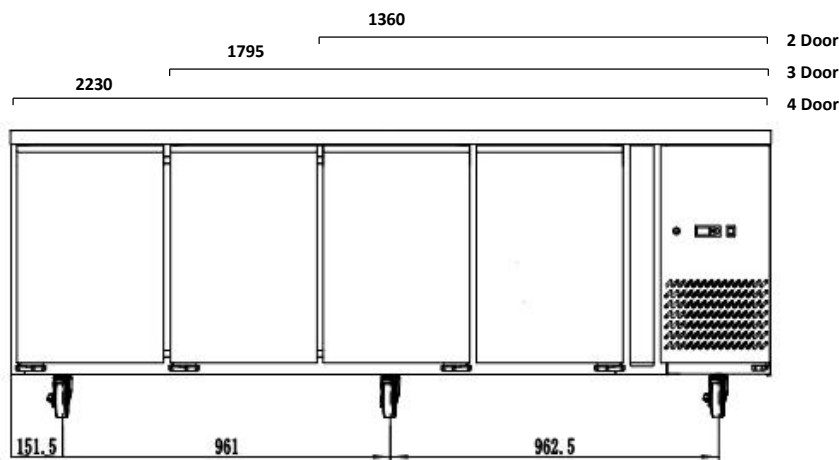

Model	EPF3422HD	EPF3462HD	EPF3432HD	EPF3472HD	EPF3442HD	EPF3482HD
Exterior Dimension (WxDxH) mm	1360 x 700 x 839	1360 x 700 x 839	1795 x 700 x 839	1795 x 700 x 839	2230 x 700 x 839	2230 x 700 x 839
Interior Dimension (WxDxH) mm	822 x 570 x 580	822 x 570 x 580	1257 x 570 x 580	1257 x 570 x 580	1692 x 570 x 580	1692 x 570 x 580
Packing Dimension (WxDxH) mm	1415 x 750 x 885	1415 x 750 x 885	1850 x 750 x 885	1850 x 750 x 885	2285 x 750 x 885	2285 x 750 x 885
Shelf Dimensions mm	330 x 555 shelf	330 x 555 shelf	330 x 555 shelf	330 x 555 shelf	330 x 555 shelf	330 x 555 shelf
Shelf Quantity	2 per section	2 per section	2 per section	2 per section	2 per section	2 per section
Shelf Loading Capacity (Kg Pc)	40	40	40	40	40	40
Capacity (Litre)	215	215	334	334	450	450
Net Weight (Kgs)	95	95	120	120	145	145
Gross Weight (Kgs)	119	122	148	150	176	178
Voltage	220/50/1	220/50/1	220/50/1	220/50/1	220/50/1	220/50/1
Power (Watts)	250	600	400	600	400	600
Electrical Current (Amps)	1.5	3.0	1.9	3.0	1.9	3.0
KWh/annum	490	1449	630	1859	699	2236
Energy Efficiency Class	A	C	A	C	A	C
Climate Class	5	5	5	5	5	5
Defrost Method	Air Defrost	Hot Gas Defrost	Air Defrost	Hot Gas Defrost	Air Defrost	Hot Gas Defrost
Refrigerant Type / Amount	R600a / 120g	R290hc / 140g	R290hc / 130g	R290hc / 140g	R290hc / 130g	R290hc / 140g
Cooling Method	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Inner Temperature (°C)	+2°C to +8°C	-18°C to -22°	+2°C to +8°C	-18°C to -22°	+2°C to +8°C	-18°C to -22°
Insulation	Polyurethane foam	Polyurethane foam	Polyurethane foam	Polyurethane foam	Polyurethane foam	Polyurethane foam
Foaming Material	C5H10	C5H10	C5H10	C5H10	C5H10	C5H10
Castors	4 (2 Braked on front)	4 (2 Braked on front)	4 (2 Braked on front)	4 (2 Braked on front)	6 (3 Braked on front)	6 (3 Braked on front)
Material External / Internal	S/S Int + Ext	S/S Int + Ext	S/S Int + Ext	S/S Int + Ext	S/S Int + Ext	S/S Int + Ext
Lighting	No	No	No	No	No	No
Door lock	No	No	No	No	No	No