


ORACGBXL

HIGH SPEED OVEN - ALL IN ONE. COMBI WAVE / HIGH SPEED OVEN - BOOSTED VERSION (STEEL)



High Speed Oven

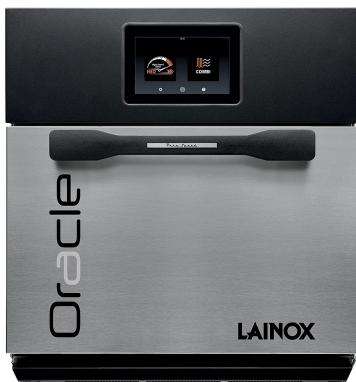

Combi Wave

Features



HIGH SPEED OVEN

An operating mode that simultaneously uses convection, microwave and impingement modes, with temperatures from 100°C to 300°C.



FAST COOKING SYSTEM

Rely on Lainox's know-how by using the automatic, tried-and-tested recipes for high-speed cooking in High Speed Oven mode.



COMBI WAVE

In Combi Wave mode, Oracle can be used as a convection oven with temperatures from 30°C to 300°C, as a microwave oven with power up to 2000 W or with a combination of the two cooking methods to achieve results that always exceed expectations.



MICROWAVE COOKING SYSTEM

Rely on Lainox's know-how by using the automatic, tried-and-tested recipes for cooking in Combi Wave mode.



CONNECTED

Oracle connects free-of-charge to Lainox's Nabook plus portal via the standard- supply Wi-Fi and ethernet features giving you a 4.0 kitchen (find out more on nabookplus.cloud).



OWB - ORACLE WASHABLE BOX

A special Teflon oven chamber which can be removed and washed for the next round of cooking, making the cleaning procedure fast and cost-effective.



OOS - ORACLE ODORLESS SYSTEM

A labyrinth baffle catalyst filter containing platinum particles which help to reduce steam, odours and grease residue during cooking. The Oracle Odorless System does not require any cleaning or routine maintenance work. Its efficiency is always guaranteed.

Capacity		
Capacity		Steel - 36.4 lt.
Dimensions		
Width	mm	577 inch 22.7
Depth	mm	797 inch 31.4
Height	mm	630 inch 24.8
Maximum outer width	mm	467 inch 18.4
Max exterior depth	mm	657 inch 25.9
Maximum exterior height	mm	630 inch 24.8
Packaging width	mm	990 inch 39.0
Packing depth	mm	770 inch 30.3
Packaging height	mm	800 inch 31.5
Net weight	kg	74 lbs 163.2
Gross weight	kg	86 lbs 189.6
Volume	m ³	0.29 ft ³ 10.2
Packing volume	m ³	0.61 ft ³ 21.5
Cooking compartment width	mm	460 inch 18.1
Cooking compartment depth	mm	440 inch 17.3
Cooking chamber height	mm	180 inch 7.1
Support base width	mm	536 inch 21.1
Support base depth	mm	646 inch 25.4
Power plug configuration	IEC 309	
Cable length	m	2 ft 6.56

Technical Data

Working temperature °C High Speed Oven: 100 / 300 °C - Combi Wave: 30 / 300 °C °F NaN

Power supply

Power supply voltage	3N-AC 400 V
Electrical absorption	A 18
Frequency	Hz 50
Total electric power	kW 6
Microwave	kW 2
Impingement	kW 3

OPTIONAL ELECTRIC CONFIGURATION, WITHOUT EXTRA CHARGE - TO BE REQUESTED WHEN ORDERING

Option code	Connection plug (Plug provided)	Cable length (Provided - mt.)	Power supply voltage	Frequency Hz	Total electric power		Power output - kW		Country
					kW	A	Impingement	Microwave	
OR380	-	2	3N-AC 380 V	60	6	18	3	2	KSA/KO/LATAM
OR3230	-	2	3-AC 230 V	60	6	18	3	2	LATAM
OR3208	-	2	3-AC 208 V	60	6	20	3	2	LATAM
OR32305	-	2	3-AC 230 V	50	6	18	3	2	
OR3093	IEC 309 - 32 A	2	1N-AC 230 V	50	6	26	3	2	EU

AUS Australia	EU Europe	KO South Korea	KSA Kingdom of Saudi Arabia	LATAM Latin America	UK United Kingdom
--------------------	----------------	---------------------	----------------------------------	--------------------------	------------------------

HOW TO USE

- Programmable mode: possibility of programming and storing a recipe with its cooking procedures in automatic sequence.
- High Speed Oven. - FCS (Fast Cooking System) automatic cooking system for Italian and international recipes, including the history, ingredients, cooking accessories, method and automatic cooking program. - Manual mode with instant start.
- Combi Wave. - MCS (Microwave Cooking System) automatic cooking system for Italian and international recipes, including the history, ingredients, cooking accessories, procedure and automatic cooking program. - Manual mode with three instant start cooking methods: convection, microwave or combined convection + microwave.

CONNECTIVITY

- Nabook Plus - Thanks to the Cloud feature, it is possible to access Nabook Plus, the virtual kitchen assistant (read more on nabookplus.cloud, free registration).
- Recipe creation including ingredients with procedure and photo.
- Direct access by Oracle to the recipe database with download option (patented).
- Synchronisation of multiple Oracle ovens connected to the same account (patented).
- HACCP Monitoring.
- Remote diagnosis through the Nabook plus portal by the LAINOX Service Center.
- Automatic software update notification system.
- Possibility to download recipes from the Nabook Plus portal based on country.
- Possibility to run automatic software updates on multiple devices simultaneously.
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4 GHz) standard.

CONTROL MECHANISMS

- Automatic fan speed for High Speed Oven mode.
- Possibility of choosing the fan speed.
- USB connection to download HACCP data, update software and upload/download cooking recipes.

STRUCTURAL CHARACTERISTICS

- Pull-down door with ergonomic handle.
- Perfectly smooth room.
- Integrated catalyst filter for operation without hood.
- The door slides under the oven cooking surface, allowing the food to removed safely without the risk of burns.

OPERATION

- Display that can be configured based on the needs of the user, bringing forward the programmes used most.
- Organisation of recipes in folders with preview, giving each folder its own name.
- High-definition 7-inch capacitive LCD color screen with choice of "Touch Screen" functions.
- User interface with a choice of 29 languages.
- Starting an automatic "One Touch" cooking.
- Possibility of preheating the cooking chamber up to 300°C.
- Rapid cooling of the cooking chamber with open door.
- There are about 30 recipes available in Oracle and a growing number of alternative ones are available via access to the Nabook plus portal. Each recipe has been tested to guarantee best results.
- Oracle coach. Virtual assistant that provides advice on using Oracle and informs when maintenance is needed.

SAFETY FEATURES

- Door open/closed electronic sensor.
- Self-diagnosis with smart error viewing.
- Max 65°C external temperature on the door panel.
- Compliant with the IEC60335-1, IEC60335-2-90 and EMC international standards.

CLEANING AND MAINTENANCE

- OWB - Oracle Washable Box. special removable and washable box chamber.
- Easy external cleaning thanks to the perfectly smooth surfaces and IPX3 protection rating against water spray.

INSTALLATION AND ENVIRONMENT

- 100% recyclable packaging.
- Product recycling rate: 90%.
- Quality ISO 9001 / Safety ISO 45001 / Environmental ISO 14001 certification.

STANDARD EQUIPMENT

- Ethernet connection
- Smooth cooking plate - Nonstick heat storage - Teflon-coated aluminum alloy
- Aluminium peel (570 x 420 x 100 mm)
- Oracle Washable Door Cover. Removable and washable inner door protection
- Electric plug
- Power cable - 2 m
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4GHz) standard
- Oracle Washable Box
- USB connection

OPTIONAL TO BE REQUESTED WHEN ORDERING

OR380: Optional electric configuration, without extra charge. 3N-AC 380-400 V - 60 Hz. Plug not included


OR3230: Optional electric configuration, without extra charge. 3-AC 230 V - 60 Hz. Plug not included

OR3208: Optional electric configuration, without extra charge. 3-AC 208 V - 60 Hz. Plug not included

OR32305: Optional electric configuration, without extra charge. 3-AC 230 V - 50 Hz. Plug not included

OR3093: Optional electric configuration, without extra charge. 1N-AC 230 V - 50 Hz. Plug included (IEC 309 - 32 A)

SOWBHDX: Extra charge for Oracle Washable Box Heavy Duty version OWBHDX. Replaces the standard model

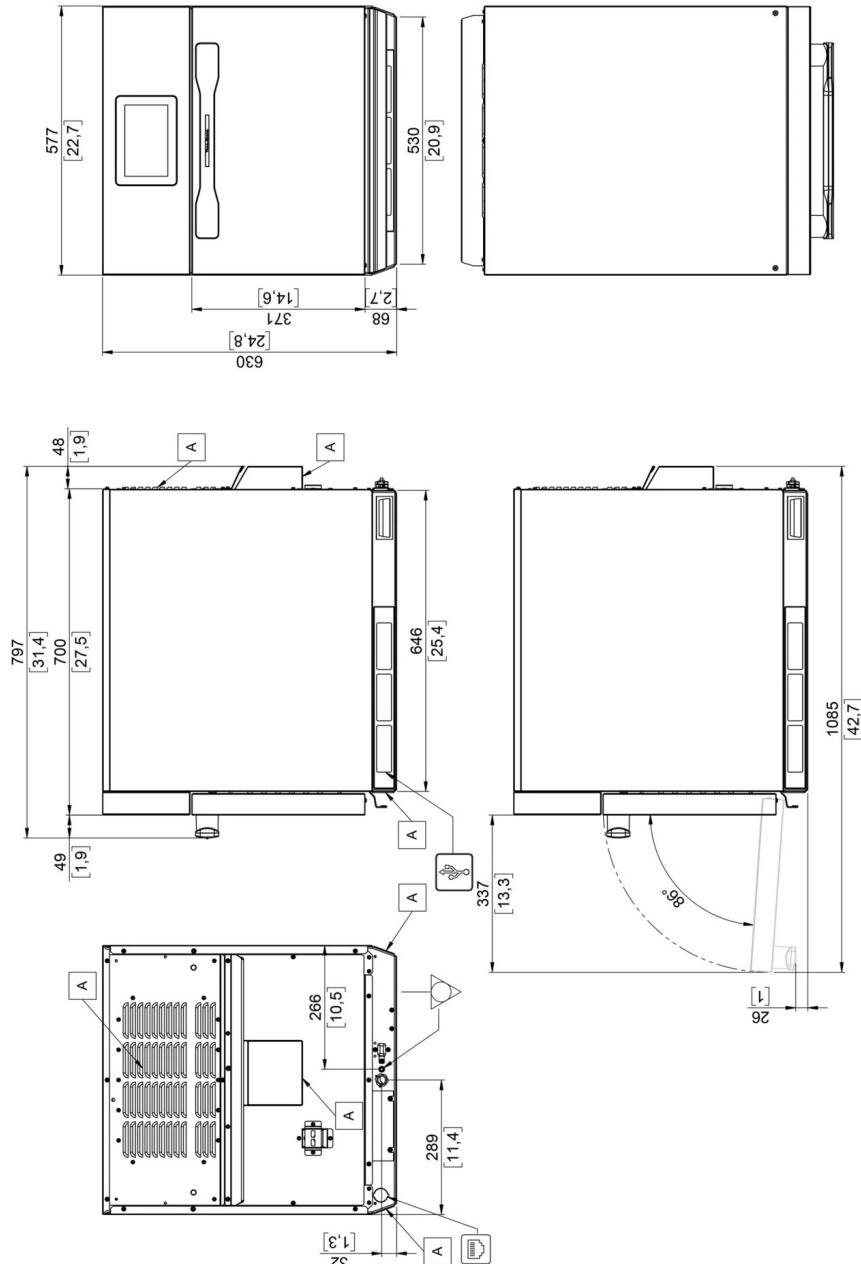

Dimensions: Millimeters [inches]

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice

LAINOX

LAINOX ALI Group Srl
Via Schiapparelli 15
Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) · Italy

Tel +39 0438 9110
Fax +39 0438 912300
lainox@lainox.com
www.lainox.com



21/10/2025