lincat





P8B6 - Lincat Panther 800 Series Free-standing Hot Cupboard - Bain Marie Top - 6GN - W 2180 mm - 5.2 kW Helping to cater in demanding environments such as cafeterias, canteens and restaurants, the Panther 800 Series Hot Cupboard / Bain Marie is an effective way of holding food at the desired temperature, and is perfect for holding carvery and breakfast items either for self service or for back service.

- Helping to cater in demanding environments such as cafeterias, canteens and restaurants
- Fan assisted hot cupboard provides even heat distribution, fast heat up and recovery times, and lower energy usage. Four shelf positions allow adjustment to meet individual needs.
- Fully 1/1 GN compatible hot cupboard for operational efficiency. Units available to take 6 x 1/1 GN containers up to 150mm deep.
- Thermostatically controlled bain marie top can be operated with wet or dry heat. Accurate digital electronic control of the hot cupboard temperature, adjustable between 20 and 99 °C, ensures compliance with food hygiene regulations
- Double skinned construction provides efficient heat retention and a cool to touch exterior - safe and energy efficient. Removable doors and shelves allow access to the fully stainless steel interior for easy cleaning
- Supplied with two heavy duty multi-section chrome plated rod shelves capable of taking the heaviest loads
- Drain tap located inside the hot cupboard allows fast and easy draining

Specifications

Summary		Power and Performance	
Brand	Lincat	Total Power kW	5.20
Range	Panther	Temperature Range °C	20-99
Series	800 Series	IP Rating	IP24
Power Type	Electric	Temperature Control	Top: Mechanical; Bottom: Electronic
Unit Type	Free-standing		
Available in UK Only	No		
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105103530		
Key Specifications		Capacity	
Drain Location	Right side interior mounted	Gastronorm Capacity	6 × GN1/1
Number of Shelves included	2	Plate Capacity	556
Number of Shelf Positions	4		
Pot Type	Gastronorm		
Type of Heat	Wet/Dry		
Heated Base	Yes		

Heated Gantry

Static or Mobile

No

Mobile

lincat

PANTHER

Weights and Dimensions

Unit Height (External) mm	912
Unit Width (External) mm	2180
Unit Depth (External) mm	850
Height (Internal) mm	432
Width (Internal) mm	1,995
Depth (Internal) mm	512
Shelf Dimensions Width mm	1,929
Shelf Dimensions Depth mm	512
Net Weight Kg	167

Shipping

Packed Weight Kg	197
Packed Height cm	110
Packed Width cm	222
Packed Depth cm	90

Supply Connections

Requires Installation	Yes
Requires Electrical Supply	Yes
UK 3 Pin Plug	No
Requires Hardwiring	Yes
Electrical Supply Rating Watts	5,200
Single Phase Amps	22.6
Single Phase Voltage	230

Available Options Overshelf or Gantry PS6A1 PS6A1 - 1 Ambient Overshelf PS6A2 PS6A2 - 2 Ambient Overshelves PS6A3 PS6A3 - 3 Ambient Overshelves PS6H1 PS6H1 - 1 Heated Overshelf PS6H2 PS6H2 - 2 Heated Overshelves PS6H3 PS6H3 - 3 Heated Overshelves Door Locks PDL6 PDL6 - Lockable Door **Corner Guards** PCG PCG - Corner Guards [Set of Four] Trayslides PTS6 PTS6 - Tray Slide Legs/Castors PLK PLK - Legs[non chargeable] **Available Accessories**


CP16	CP16 - CARVERY PAD [1/1 GASTRONORM SIZE]
PGK1	PGK1 - GASTRONORM PACK
PGK19	PGK19 - GASTRONORM PACK
PGK2	PGK2 - GASTRONORM PACK
PGK20	PGK20 - GASTRONORM PACK
PGK21	PGK21 - GASTRONORM PACK
PGK22	PGK22 - GASTRONORM PACK
PGK23	PGK23 - GASTRONORM PACK
PGK24	PGK24 - GASTRONORM PACK
PGK25	PGK25 - GASTRONORM PACK
PGK3	PGK3 - GASTRONORM PACK
PGK4	PGK4 - GASTRONORM PACK


lincat


PANTHER

Available Accessories	
PGK7	PGK7 - GASTRONORM PACK
РНТС	PHTC - CERAMIC INSERT [1/1 GASTRONORM SIZE]
РНТС	PHTG - GLASS INSERT [1/1 GASTRONORM SIZE]
PLK/S	PLK/S - LEG KIT [FOR CONVERSION IN THE FIELD]
PPB8	PPB8 - ADDITIONAL PUSHBAR

Technical Picture

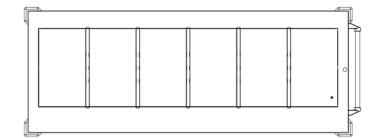

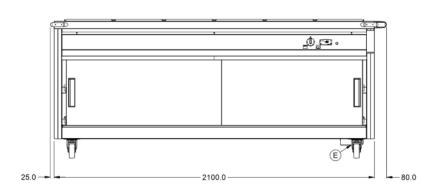







lincat frifri

Lincat Limited

Whisby Road, Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm