

Model:
XMD1800-P-NB-W

Panoramic open fronted multideck
10 x 913mm shelves, undershelf LED lighting



F

General Information

Prodis XMD1800-P-NB-W panoramic open fronted multideck finished in RAL9003 Signal White.




Key Features

- -1°C to +7°C (M2) temp. range
- Forced air refrigeration
- 10 x 365mm deep adjustable height and angle shelves
- 380mm base shelf
- 2 x 913mm shelf width
- (10) shelf edge ticket strips
- Undershelf LED lighting
- 810 litre (net) volume
- 3.11m² display area
- Slow rise nightblind
- HMI digital temperature controller
- R290 refrigerant
- 13amp plug in cabinet

Construction

- Painted steel construction
- RAL9003 Signal White interior and exterior
- 30mm panoramic Low E glazed end panel
- Steel front grill secured with neodymium magnets

Energy Label

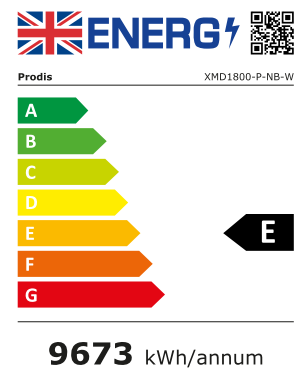

3.11 m² 7°C -1°C

Technical Data	
Model	XMD1800-P-NB-W
Color	Signal White RAL9003
End panel	Panoramic Low E glass 30mm
Night blind	Slow rise
Cabinet construction	Painted steel
Cabinet dimensions	1890 x 740 x 2000 (w,d,h mm)
End panel dimensions	30 x 740 x 2000 (w,d,h mm)
Shelf dimensions	913 x 365mm
Base dimensions	1800 x 380mm
Number of shelves	10 + base
Shelf angle adjustment	0° / 7° / 14°
Shelf edge ticket strips	10 + base
Lighting	Undershelf LED (10) + top LED
Glass	Double glazed Low E
Controller	Digital with light switch
Packaged dimensions	1963 x 780 x 2100 (w,d,h mm)
Net weight	330kg
Gross weight	348kg
Net volume	810 litres
Total display area	3.11m ²
System type	Plug-in
Temperature range	-1°C to +7°C M2
Climate class	3 (25°C; 60%RH)
Refrigerant	R290
Refrigerant charge	2 x 149 gram
Compressors	2
Evaporator fans	2
Consender fans	4
Noise level	≤65 dB
Energy consumption	26.5 kWh / 24h
Rated power	1800 W
Voltage	220V / 50Hz
Fuse requirements	13amp



Approvals	Available At	Document #
UKCA CE 		