
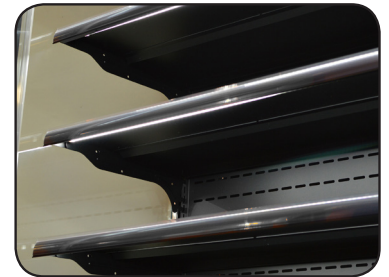


Model:  
XMD1875-P-FGD-K

Panoramic frameless glass door multideck  
10 x 935mm shelves, undershelf LED lighting

## General Information

Prodis XMD1875-P-FGD-K panoramic framless glass door multideck finished in RAL9005 Jet Black.

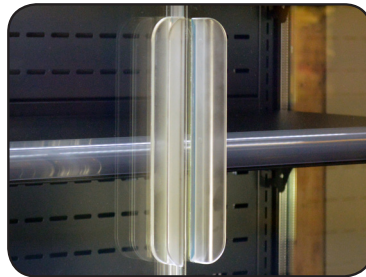



## Key Features

## Construction

## Energy Label

- -1°C to +5°C (3M1) temp. range
- Forced air refrigeration
- 10 x 450mm deep adjustable height and angle shelves
- 330mm base shelf
- 935mm shelf width
- (10) shelf edge ticket strips
- Undershelf LED lighting
- 1292/764 litre (gross/net) volume
- 4.05m² display area
- Self closing double glazed frameless doors with Low E treatment
- HMI digital temperature controller
- R290 refrigerant
- 13amp plug in cabinet

- Painted steel construction
- RAL9005 Jet Black Interior and exterior
- 30mm panoramic Low E glazed end panel
- Slide out low maintenance condensing unit
- Steel front grill secured with neodymium magnets

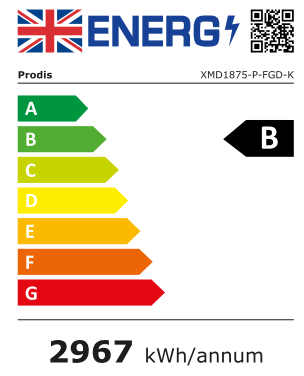

| Technical Data           |                               |
|--------------------------|-------------------------------|
| Model                    | XMD1875-P-FGD-K               |
| Color                    | Jet Black RAL9005             |
| End panel                | Panoramic Low E glass 30mm    |
| Door style               | Framless double glazed        |
| Door handle              | 'L' shaped, frosted           |
| Cabinet construction     | Painted steel                 |
| Cabinet dimensions       | 1935 x 740 x 2010 (w,d,h mm)  |
| End panel dimensions     | 30 x 740 x 2010 (w,d,h mm)    |
| Shelf dimensions         | 935 x 450mm                   |
| Base dimensions          | 1875 x 330mm                  |
| Usable height            | 1540mm                        |
| Number of shelves        | 10 + base                     |
| Shelf angle adjustment   | 0° / 7° / 14°                 |
| Shelf edge ticket strips | 10                            |
| Lighting                 | Undershelf LED (10) + top LED |
| Doors                    | 3 (2 right hand, 1 left hand) |
| Glass                    | Double glazed Low E           |
| Controller               | Digital with light switch     |
| Door dimensions          | 611 x 20 x 1653 (w,d,h mm)    |
| Packaged dimensions      | 1965 x 767 x 2120 (w,d,h mm)  |
| Net weight               | 370kg                         |
| Gross weight             | 420kg                         |
| Gross volume             | 1939 litres                   |
| Net volume               | 1147 litres                   |
| Total display area       | 4.05m <sup>2</sup>            |
| System type              | Plug-in                       |
| Temperature range        | -1°C to +5°C 3M1              |
| Climate class            | 3 (25°C; 60%RH)               |
| Refrigerant              | R290                          |
| Refrigerant charge       | 2 x 135 gram                  |
| Compressors              | 2                             |
| Evaporator fans          | 2                             |
| Consender fans           | 4                             |
| Noise level              | ≤58 dB                        |
| Energy consumption       | 8.13 kWh / 24h                |
| Rated power              | 980 W                         |
| Voltage                  | 220V / 50Hz                   |
| Fuse requirements        | 2 x13amp                      |



| Approvals | Available At | Document # |
|-----------|--------------|------------|
|           |              |            |