

Model:
XPD1250-P-G-LE

Heavy duty double door display fridge
10 x adjustable shelves, twin vertical mullion mounted LED lighting



General Information

Prodis XPD1250-P-G-LE double door heavy duty, energy efficient, professional display fridge with twin vertical LED lighting.




Key Features

- -1°C to +10°C temperature range
- Forced air refrigeration
- 10 x adjustable shelves (566x480mm)
- (10) shelf edge ticket strips
- Twin vertical LED lighting
- 1081/809 litre (gross/net) volume
- 1.58m² display area
- Self closing double glazed doors with Low E treatment
- HMI digital temperature controller
- R290 refrigerant
- 13amp plug in cabinet

Construction

- White cabinet exterior
- Grey fronted with aluminium door frames
- White cabinet interior with stainless steel floor for durability
- Low profile aluminium door frames for increased product visibility

Energy Label

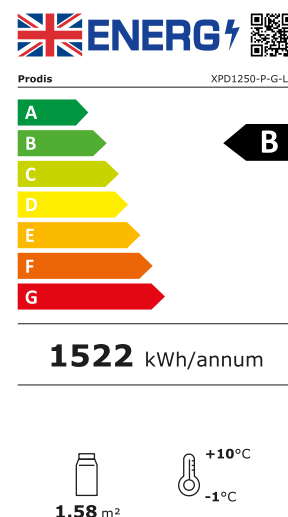

Technical Data	
Model	XPD1250-P-G-LE
Color	White exterior, grey Fronted
Door Frame	Low profile aluminium
Glass	Double glazed with low E treatment (outer layer tempered)
Door handle	Full length
Cabinet construction	Painted steel
Gross volume	1081 litres
Net volume	809 litres
Display Area	1.58m ²
Cabinet dimensions	1253 x 710 x 2003 (w,d,h mm)
Internal dimensions	1163 x 595 x 1568 (w,d,h mm)
Packaged dimensions	1278 x 760 x 2090 (w,d,h mm)
Shelf dimensions	566 x 480mm
Net weight	179 kg
Gross weight	197 kg
Heated glass	×
Doors	2
Self closing	✓
Shelves	10 (566 x 480mm) adjustable
Shelf edge ticket strips	✓
Controller	Digital HMI
Door dimensions	742 x 1587 (w,d mm)
Lights	Twin vertical LED mullion mounted
Light power	24w
Light switch	External
System type	Plug-in
Temperature range	-1°C to +10°C
Climate class	4 (30°C; 55%RH)
Refrigerant	R290
Refrigerant charge	110 gram (2 x 80g twin system)
Compressors	1
Evaporator fans	1
Condenser fans	1
Noise level	≤62 dB
Energy consumption	4.17 kWh / 24h
Rated power	510 W
Voltage	220V / 50Hz
Fuse requirements	13amp



Approvals	Available At	Document #