



## Under counter

Standard drawers + cover top



## Applications

- Bulk storage right at the point of use
- Range of finished height units available, to suit a wide variety of spaces in the kitchen
- Unique patented Low Velocity Cooling keeps food fresher for longer

## Storage Capacity

**Gastronorm (GN) Pans**  
4 x 1/1 GN  
100 mm Deep  
or equivalent (per Drawer)

**Maximum Weight**  
40 kg of Food (per Drawer)


**Volume**  
86 Litres (per Drawer)

## Hydrocarbon R600a Refrigerant

### Standard drawer

'B' Energy Rating  
in Freezer Mode

'A' Energy Rating  
in Fridge Mode  
(Consumption 307  
kWh/annum)

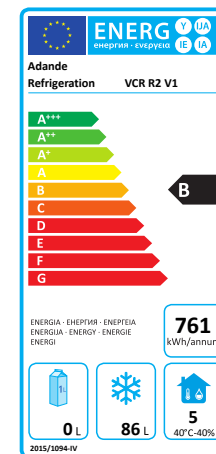

## Climate Testing

Tested to **Climate Class 4**  
(30°C & 55% relative humidity)  
for temperature and energy  
consumption and to **Climate  
Class 5** (40°C & 40% relative  
humidity) for temperature

## Electrical

**Mains Supply**  
230 Vac 50 Hz

**Power Socket (included)**  
Correct 2 or 3 Pin Plug  
fitted for each country

**Mains Lead (included)**  
2 Metre Coiled Lead





## UNDER-COUNTER – ONE DRAWER – REAR ENGINE – VCRI


### Options

UNDER COUNTER + COVER TOP (T)	High castor base (HC)		Standard castor base (C)		Small castor base (SC)		Rollers & feet base (R)		Small rollers & feet base (SR)		Fixed frame base (FF)		Mobile frame base (MF)	
Finished height	565 mm	VCRI/HCT	494 mm	VCRI/CT	473 mm	VCRI/SCT	449 mm	VCRI/RT	439 mm	VCRI/SRT	590-900 mm	VCRI/FFT	590-900 mm	VCRI/MFT
Load-bearing capacity	0 kg		0 kg		0 kg		0 kg		0 kg		0 kg		0 kg	

For full options please see our [Drawer Customising](#) and [Accessories](#) pages


### Plan View

Under counter (VCRI)  
With open drawer

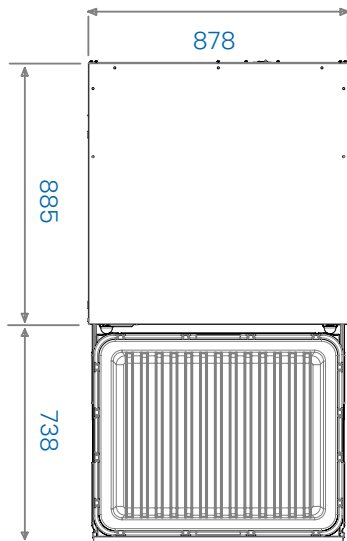

### Elevation

Under counter (VCRI)  
High castors (HC)  
Cover top (T)  
VCRI/HCT

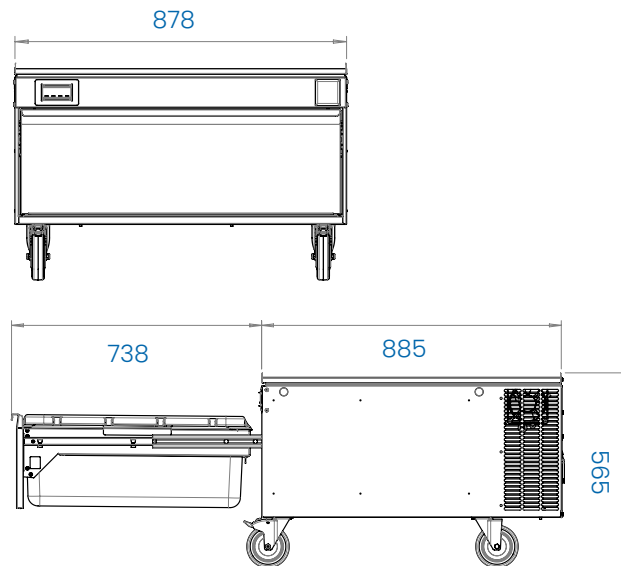

### Tops



### Drawer Module



### Base

