



## Under counter

Standard drawers + cover top



### Blast Chill

For added functionality a BC option is available with this spec Drawer

## Applications

- Bulk storage right at the point of use
- Range of finished height units available, to suit a wide variety of spaces in the kitchen
- Unique patented Low Velocity Cooling keeps food fresher for longer

## Storage Capacity

**Gastronorm (GN) Pans**  
4 x 1/1 GN  
100 mm Deep  
or equivalent (per Drawer)

**Maximum Weight**  
40 kg of Food (per Drawer)


**Volume**  
86 Litres (per Drawer)

## Hydrocarbon R600a Refrigerant

### Standard drawer

'B' Energy Rating  
in Freezer Mode

'A' Energy Rating  
in Fridge Mode  
(Consumption 307  
kWh/annum)

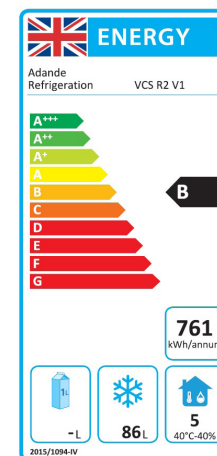

## Climate Testing

Tested to **Climate Class 4**  
(30°C & 55% relative humidity)  
for temperature and energy  
consumption and to **Climate  
Class 5** (40°C & 40% relative  
humidity) for temperature

## Electrical

**Mains Supply**  
230 Vac 50 Hz

**Power Socket** (included)  
Correct 2 or 3 Pin Plug  
fitted for each country

**Mains Lead** (included)  
2 Metre Coiled Lead






## Options

| UNDER COUNTER +<br>COVER TOP (T) | High castor<br>base (HC) |          | Standard castor<br>base (C) |         | Small castor<br>base (SC) |          | Rollers &<br>feet base (R) |         | Small rollers &<br>feet base (SR) |          | Fixed frame<br>base (FF) |          | Mobile frame<br>base (MF) |          |
|----------------------------------|--------------------------|----------|-----------------------------|---------|---------------------------|----------|----------------------------|---------|-----------------------------------|----------|--------------------------|----------|---------------------------|----------|
| Finished height                  | 565 mm                   | VCS1/HCT | 494 mm                      | VCS1/CT | 473 mm                    | VCS1/SCT | 449 mm                     | VCS1/RT | 439 mm                            | VCS1/SRT | 590-900 mm               | VCS1/FFT | 590-900 mm                | VCS1/MFT |
| Load-bearing capacity            | 0 kg                     |          | 0 kg                        |         | 0 kg                      |          | 0 kg                       |         | 0 kg                              |          | 0 kg                     |          | 0 kg                      |          |

For full options please see our [Drawer Customising](#) and [Accessories](#) pages


## Plan View

Under counter (VCS1)  
With open drawer

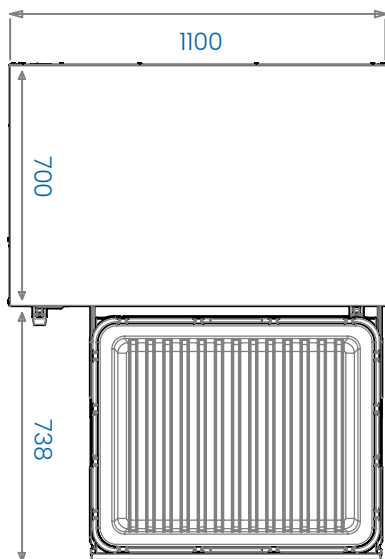

## Elevation

Under counter (VCS1)  
Standard castors (C)  
Cover top (T)  
VCS1/CT

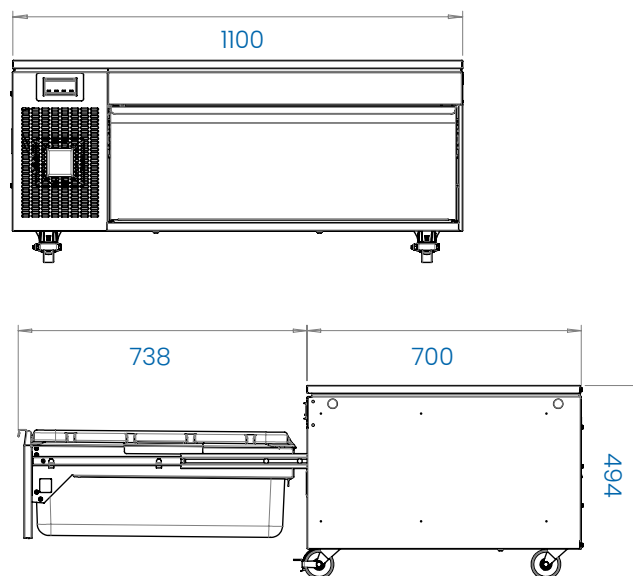

## Tops



## Drawer Module



## Base

