

HIGH-TECH DOUBLE SKIN GLASS & DISHWASHERS



MAIN FEATURES

- Intuitive START button with multicolour backlight for a quick visualization of the machine status
- Thermostop to grant the rinse temperature according to HACCP regulations
- · Wash and rinse temperatures displayed
- Four programmable wash cycles
- · Soft Start wash pump
- Self-cleaning cycle

- Soft door opening with a ventilation position
- OPTIMAL-RINSE
- Suitable for Gastronorm 1/1 trays
- Detergent and rinse pump included
- Built-in drain pump
- Built-in Water pressure pump
- · WMaxx water management
- · Break Tank wras approved

OPTIONS

- · Special voltages on request
- · Cold rinse
- · Automatic integrated water softener

TECHNICAL SPECIFICATIONS

- Dimensions: 600 x 610 x 850 mm
- Power Supply: 240V 1N 50Hz (380/400V 3 60Hz "Marina")
- Rack dimensions: 500 x 500 mm




RACK EQUIPMENT

- 1 Rack for plates
- 1 Rack for glasses
- 1 Cutlery holder



HIGH-TECH DOUBLE SKIN GLASS & DISHWASHERS

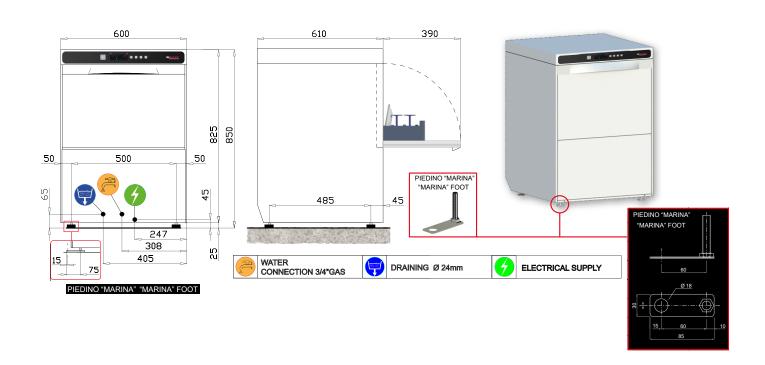

TECHNICAL DATA

EXTERNAL DIMENSIONS					
width		600 mm			
depth		610 mm			
height		850 mm			
WEIGHT		63.5 Kg			
VOLTAGE	400V 3N 5	400V 3N 50Hz (380/400V 3 60Hz "Marina")			
POWER REQUIRED		3700 W			
AMPERE MAX		15,9 A			
WATER HARDNESS		2-8 °F			
INLET WATER PRESSURE		200-400 kPa			
CROCKERY DIMENSIONS					
plates diameter	340 mm				
dishes max. height		325 mm/GASTRONORM			
WASHING CYCLES	1 (60)	2 (90)	3 (120)	4 (180)	
WATER SUPPLY 55°C					
racks/h(*)(1)	60	40	30	20	
WATER SUPPLY 10°C					
racks/h(*)(1)	24	20	20	20	
WATER CONSUMPTION / CYCLE (WATER PRESSURE 200KPA)		2.3 L			
BOILER CAPACITY		5.7 L			
BOILER HEATING ELEMENT		4500 W			

RINSING TEMPERATURE (SET)	70°C	85°C		
TANK CAPACITY	16.5 L			
TANK HEATING ELEMENT	2700 W (2230W "Marina")			
TANK TEMPERATURE (SET)	55 °C			
PUMP POWER	650 W (340 I/min***)			
DRAIN PUMP (OPTIONAL)	25 W h M	5 W h MAX draining 0.8m (40 L/min***)		
NOISE	61,3±0.7 dB(A)			

^(*) standard termostop (***) maximum flow rate

1. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.