E27M2

TECHNICAL DATA SHEET FOR

E27M2 ON THE SK2731N / SK2731U STAND

Full Size Manual / Electric Convection Oven on a Stainless Steel Stand

STANDARD FEATURES

- 2 18" x 26" / 460 x 660 full size sheet pan capacity
- 2 600 x 400 tray capacity
- 115mm tray spacing
- Compact 810mm width
- Bi-directional reversing fan system
- 2.8kW heating power
- 13A plug-in cordset fitted
- Vitreous enamel oven chamber
- Plug-in continuous oven door seal
- Safe-Touch vented drop down door
- Stay-Cool door handle
- Heavy-duty door hinges
- Easy clean door glass system
- Mechanical thermostat 50-260°C
- 60 minute timer with time up alarm
- Dual halogen oven lamps
- Dia. 180mm full stainless steel oven fan
- Anti-skid 50mm dia. 76mm high adjustable stainless steel feet
- 2 oven wire racks supplied
- 100% recyclable packaging

ACCESSORIES

- Turbofan SK2731N Oven Stand suits 600 x 400 trays and GN 1/1 pans
- Turbofan SK2731U Oven Stand suits 26" x 18" / 660 x 460 pans



E27M2 Unit shall be a Blue Seal electrically heated Turbofan convection oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean drop down door. Oven shall have capacity for two full size sheet pans. The oven shall have 2.8kW heating elements. The oven shall have a bi-directional single reversing fan system. The oven shall be controlled by a mechanical thermostat with a range of 50-260°C, a 60 minute bake timer, and feature dual halogen oven lamps. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand models SK2731N or SK2731U. Oven shall be fitted with a 13A plug-in cordset. Unit shall be supplied in 100% recyclable shipping packaging.

SK2731N Unit shall be a Blue Seal Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 600 x 400 trays and GN 1/1 pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E27M2, E27M3, E28M4, and E31D4. Unit shall be supplied in 100% recyclable shipping packaging.

SK2731U Unit shall be a Blue Seal Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E27M2, E27M3, E28M4, and E31D4. Unit shall be supplied in 100% recyclable shipping packaging.







E27M2 Full Size Manual / Electric Convection Oven on a Stainless Steel Stand

CONSTRUCTION

Vitreous enamel fully welded oven chamber Stainless steel front, sides and top exterior Stainless steel oven fan baffle and oven vent Removable 2 position chrome plated wire side racks Oven racks chrome plated wire (2 supplied) Stainless steel frame drop down hinged door 5mm thick door outer glass 5mm thick low energy loss door inner glass Heavy-duty counterbalanced door hinges

Wear resistant powder coated welded door handle Stainless steel control panel Aluminised coated steel base and rear panels

CONTROLS

Power ON control panel indicator Mechanical thermostat 50-260°C Heating ON control panel indicator Manual 60 minute timer

Time-Up control panel indicator and buzzer Over-temperature safety cut-out

CLEANING

Stainless steel top and sides continuous exterior panel Vitreous enamel oven chamber

Fully removable chrome plated oven side racks Removable stainless steel oven fan baffle

Full stainless steel oven fan

Easy clean door system with hinge out door inner glass (no tools required)

Removable plug-in oven door seal (no tools required) 76mm high stainless steel feet for easy access underside

SPECIFICATIONS

Electrical Requirements 230-240V, 50Hz, 1P+N+E, 3kW, 12A

13A cordset fitted

External Dimensions Width 810mm

Height 607mm including 76mm feet

Depth 762mm Oven Internal Dimensions

Width 695mm 305mm Height 470mm Depth 0.10m3 Volume Oven Rack Dimensions Width 660mm Depth 460mm Nett Weight (E27M2)

Packing Data (E27M2)

77.8kg

60.2kg

0.55m3

Width 870mm 755mm Height 835mm Depth

SK2731N / U Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E27, E28 and E31 Series model ovens

6 position tray runners standard

76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel

Welded 38mm and 32mm square tube front and rear frames Welded rack supports/side frames

4 dia. 6mm swivel castors with 2 front castors dual wheel and swivel lock

Top frame oven supports suit Turbofan E27, E28 and E31 Series oven mounting

Supplied CKD for assembly on site

External Dimensions (SK2731N / U Oven Stand)

810mm Width Height 220mm Depth 650mm

Nett Weight (SK2731N / U Oven Stand)

19.5kg

Packing Data (SK2731N / U Oven Stand)

22kg 0.11m3

830mm Width Height 900mm Depth 152mm

OBLUE SEAL

www.blue-seal.co.uk www.bluesealequipment.com www.turbofanoven.com

United Kingdom Blue Seal Limited


Unit 67 Gravelly Business Park Gravelly Birmingham B24 8TQ England Telephone 0121-327 5575 Facsimile 0121-327 9711 sales@blue-seal.co.uk www.blue-seal.co.uk www.bluesealequipment.com

Australia Moffat Pty Limited

740 Springvale Road Mulgrave, Victoria 3170 Australia Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au www.moffat.com.au

New Zealand Moffat Limited

16 Osborne Street PO Box 10-001 Christchurch 8011 Telephone 03-389 1007 Facsimile 03-389 1276 sales@moffat.co.nz

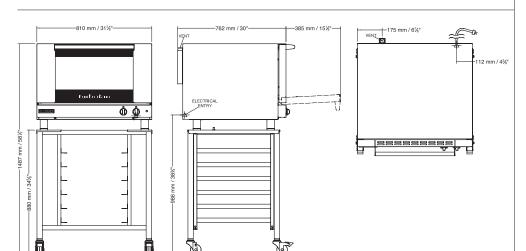



IS09001 Quality Management Standard

Designed and manufactured by

MOFFAT

ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design manufacture and final inspection, ensuring consistent high quality at all times

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



NSF.

Copyright Moffat Ltd Moffat 6.10

