


NAE201B

COMBI FOR CATERING AND LARGE BUSINESSES - 20 X 1/1 GN - ELECTRIC WITH DIRECT STEAM - STEAM GENERATOR OPTIONAL • TOUCH SCREEN CONTROLS - AUTOMATIC INTERACTIVE COOKING - EQUIPPED WITH N. 1 TROLLEY NKS201



The absolutely unique feature that distinguishes Naboo 5.0 from other professional combi ovens is called Nabook (patented). Thanks to the built-in Wi-Fi connection, you will have access to your virtual kitchen assistant and a myriad of other services (find out more on nabook.cloud).

Features



SMART

Naboo Coach, the virtual assistant which provides advice on cooking, the best washing cycle and lets you know when maintenance is required. The exclusive Naboo 5.0 Autoclima controls the ideal climate, thus guaranteeing excellent cooking quality at all times.



CONNECTED

With built-in Wi-Fi, Naboo 5.0 is always connected to Nabook Cloud, the comprehensive and free virtual kitchen assistant.



QUICK

Broccoli in just 7 minutes. 24 chickens in 30 minutes (Ref. mod.101)



STURDY

Long Life Component LLC. New long-lasting components. EMA Easy Maintenance Access to reduce service intervention times.




SMALL

Up to 15% less space by miniaturising the components (depending on model).



POWERFUL

Up to 20% more powerful. Pre-heating up to 320°C. Thanks to the new energy supply systems, Naboo 5.0 results in savings of up to 16% less compared to previous models.



EFFICIENT

Energy monitor. VCS Vapor Cleaning System, new washing system. Reduction in detergent consumption up to 30% less.



FLEXIBLE

Multilevel Plus. Configurable controls display. Editable recipes.

Capacity

Capacity	20 x GN 1/1	
Distance between layers	mm 63	inch 2.5
Meals - Croissants	n. 150 / 300 - 180 / 300	
Max. total load	kg 90	lbs 198.5
Max. tray load	kg 25	lbs 55.1

Dimensions

Width	mm 892	inch 35.1
Depth	mm 862	inch 33.9
Height	mm 1812	inch 71.3
Maximum outer width	mm 892	inch 35.1
Max exterior depth	mm 966	inch 38.0
Maximum exterior height	mm 1856	inch 73.1
Packaging width	mm 1100	inch 43.3
Packing depth	mm 1110	inch 43.7
Packaging height	mm 2040	inch 80.3
Net weight	kg 273	lbs 602.0
Gross weight	kg 316	lbs 696.8
Net weight (with steam generator)	kg 285	lbs 628.4
Gross weight (with steam generator)	kg 322	lbs 710.0
Volume	m ³ 1.39	ft ³ 49.1
Packing volume	m ³ 2.49	ft ³ 87.9
Minimum installation distance - left side	mm 50	inch 2.0
Minimum installation distance - rear side	mm 50	inch 2.0
Minimum installation distance - right side	mm 500	inch 19.7
Cooking compartment width	mm 459	inch 18.1
Cooking compartment depth	mm 650	inch 25.6
Cooking chamber height	mm 1501	inch 59.1

Power supply

Power supply voltage	3N-AC 400 V	
Electrical absorption	A 58	
Frequency	Hz 50/60	
Total electric power	kW 37,2	
Differential switch	RCD cl. B	
Steam heating power (with steam generator)	kW / kcal 36 / -	

Water Connection

Cold water inlet	ø 3/4"	
Softened water inlet	ø 3/4"	
Min. pressure	bar 2	
Max. pressure	bar 5	
Minimum water flow	Lt 10	
Drainage slope	4°	
Discharge - ø	mm 50	inch 2.0

Water quality

Water hardness for steam generation connection	°dh / ppm 6° / 9° fH	
pH value	Ph > 7,5	
Cl (chloride) - max	mg / l 30	
Cl ₂ (free chlorine)	mg / l 0,1	
Fe (iron)	mg / l 0,1	
NH ₂ Cl (monochloramine)	mg / l 0,2	
Max. cold water temperature	°C 30	°F 86.00
Max. softened water temperature	°C 50	°F 122.00
Electrical conductivity	µS 50 - 200	

Emissions

Latent heat	W 6696	
Sensitive heat	W 4464	
Max. liquid discharge temperature	°C 85	°F 185.00
Noisiness	db < 50	

Special voltages and frequencies on request

TS-NAE201B-F00	3-AC 480 V - 60 Hz
TS-NAE201B-F50	3-AC 480 V - 50 Hz
TS-NAE201B-E60	3N-AC 440 V - 60 Hz
TS-NAE201B-E50	3N-AC 440 V - 50 Hz
TS-NAE201B-D60	3-AC 440 V - 60 Hz
TS-NAE201B-D50	3-AC 440 V - 50 Hz
TS-NAE201B-C60	3-AC 400 V - 60 Hz
TS-NAE201B-C50	3-AC 400 V - 50 Hz
TS-NAE201B-B60	3-AC 230 V - 60 Hz
TS-NAE201B-B50	3-AC 230 V - 50 Hz

HOW TO USE

- ICS (Interactive Cooking System), an automatic cooking system for Italian and international recipes including their history, ingredients, cooking accessory, procedure, automatic cooking programme and a photographic plate presentation.
- Manual mode with three cooking modes and instant cooking start: convection from 30°C to 300°C, steam from 30°C to 130°C, combination convection + steam from 30°C to 300°C.
- Programmable modes: possibility to programme and save a recipe with its cooking methods in an automatic sequence (up to 15 cycles) giving each programme its own name, picture and information on the recipe.
- MULTILEVEL PLUS - The multi-level function on each shelf means doubling production capacity (patented).
- Autoclima® - System that automatically manages the perfect climate in the cooking chamber.
- Fast-Dry Boosted® - Automatic system for quick dehumidification of the cooking chamber.
- MULTILEVEL mode - Possibility to cook different foods simultaneously with different cooking times.
- JUST IN TIME (JIT) mode - Allows different foods to be taken out of the oven at the same time. All with utmost organisation and best results guaranteed, always (patented).
- Night cooking. Low temperature night cooking and subsequent holding guarantees perfect maturation of the meat with minimum weight loss and low power consumption.
- Pre-heating at 320°C.
- SmokeGrill for barbecue system (patented). Recyclable SmokeEssence dispenser (optional).

CONNECTIVITY

- Nabook - Thanks to the Cloud feature, it is possible to access Nabook, the virtual kitchen assistant (read more on nabook.cloud, free registration).
- Recipe creation including ingredients with procedure and photo.
- Direct access from cooking device to recipe database, with optional download (patented).
- Menu creation with calorie count and list of allergens with layout for customised print out.
- Food cost calculation of recipes and single portion menus.
- Organisation of shopping list to export in Word format.
- Synchronisation of devices connected to the same account (patented).
- Continuous HACCP monitoring even by remote through the Nabook portal.
- Remote diagnosis through the Nabook portal by the LAINOX Service Center.
- Automatic software update notification system.
- Remote consumption monitoring.
- LMS, LAINOX Multidisplay System - Thanks to the Nabook portal and the new LMS, you can configure your devices and synchronise your recipes in a different way for each Naboo.
- Possibility to download recipes from the Nabook portal based on country.
- Possibility to run automatic software updates on multiple devices simultaneously.
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4 GHz) standard.
- Extra charge for Ethernet connection (optional).
- Compatible with temperature monitoring system (e.g. Microlide).

CONTROL MECHANISMS

- Auto reverse (automatic reverse of fan rotation) for perfect cooking uniformity.
- Automatic parallel compartment and core temperature control, DELTA T system.
- Automatically regulated steam condensation.
- Easy access to programmable user parameters to customise the appliance through the user menu.
- Ability to choose up to 6 fan speeds; the first 3 speeds automatically trigger a reduction in heating power. For special cooking methods, you can use an intermittent speed.
- Temperature control at the product core using probe with 4 detection points.
- 2 core probe (optional).
- USB connection to download HACCP data, update software and load/download cooking programmes.
- Possibility of setting combi switch-off at the end of the automatic wash program.
- Pre-configured SN energy optimisation system (optional).
- SERVICE program: Testing the operation of the electronic board - Display of the temperature probes - Counter for operating hours of all primary functions for programmed maintenance.
- Energy Monitor - Monitoring system of energy, gas, water, cleaning chemicals.
- Self-diagnosis before starting to use the equipment, with descriptive and audible signalling of any anomalies.
- EcoVapor - With the EcoVapor system, there is a net reduction in water and energy consumption due to the automatic controls of the steam saturation in the cooking chamber.
- Low consumption LED cooking chamber lighting. Optimal visibility in all points of the cooking chamber. Neutral light that doesn't alter the original colours of the product.
- External Water-softener's efficiency monitoring system (water-softener optional).
- Reminder to clean air filters.
- Possibility to programme staggered cooking times by date and time.
- User profile block (specific function for Quick Service Restaurant - QSR).
- Intelligent Energy System - Based on the quantity and type of product, the oven optimises and controls the energy output, maintaining the best cooking temperature and avoiding fluctuations.
- TurboVapor - With the TurboVapor system the ideal level of steam is automatically produced to cook "tough" products like egg pasta or asparagus, turnip greens and chard, which are notoriously fibrous vegetables (for model with steam generator).
- Multipoint core probe with external connector, \varnothing 3 mm.
- SLCV / SLCS - Smart Chemicals Control - Precisely controls detergent consumption by alerting you when it is about to run out and suggesting the appropriate wash for the amount of detergent remaining.
- Smart Diagnostic System - Functional diagnostics to always have your equipment at its maximum performance.
- SLS - Smart Lighting System - Visual communication that allows you to understand, with just one glance, when work needs to be done (optional).
- Switch mode power supply - New highly efficient switch mode power system.

STRUCTURAL CHARACTERISTICS

- Perfectly smooth, watertight chamber.
- Door with rear ventilated double tempered glass with air chamber and interior heat-reflecting glass for less heat radiation towards the operator and greater efficiency.
- Internal glass that folds to open for easy cleaning.
- Door with three locking points. Handle brake in open door position.
- Adjustable hinge for optimal seal.
- Deflector that can be opened for easy fan compartment cleaning.
- Cooking chamber in 1 mm thick 18/10 AISI 304 stainless steel with long fully rounded edges for best air flow and easier cleaning.
- New push-in adaptable dove-tail joint seal for oven front panel made with heat and age resistant silicon rubber, easy to replace.
- Front removable control panel for easy servicing.
- Two water inlets (soft and cold water).
- New oven drain with built-in air gap in accordance with standard EN61770.
- Compact brushless magnetic drive motors.
- Solid state relay for power optimisation and modulation.
- Long Life Gasket - LLG. Automatic electromagnetic tracked frame hold and release system to preserve the seal of the stop gasket (patent pending).
- Long Life Component LLC - Use of new long-lasting components (Lainox internal approval procedure).

OPERATION

- Display that can be configured based on the needs of the user, bringing forward the programmes used most.
- Automatic "One Touch" cooking (ICS).
- Organisation of recipes in folders with preview, giving each folder its own name.
- Intelligent recognition of recipes in multilevel folders.
- 10" colour screen (LCD, high definition, capacitive, with "Touch Screen" functions).
- Instantaneous display in ICS cooking of the HACCP graphic.
- Boosted Pre-heating. Possibility to pre-heat the cooking chamber up to 320°C to reduce cooking times by up to 10% in case of a full oven.
- Cool Down function for the rapid fan-cooling of the cooking chamber.
- Automatic resumption of cooking in case of a power failure.
- Rapid cooling with possible injection of water into the cooking chamber.
- Manual humidifier.
- Acoustic and visual signalling during the various stages of cooking, with a flashing light at the end of the cycle.
- User interface with a choice of 29 languages.
- 227 recipes available, with hundreds more available by accessing the Nabook portal. Each recipe has been tested to guarantee best results.
- Possibility to view and modify the recipe at any time.
- Naboo Coach (virtual assistant). Warnings on display indicating need for maintenance.

ELECTRICAL OPERATION

- Cooking chamber heating system with armoured heating elements in INCOLOY 800 stainless steel.

STEAM GENERATION - DIRECT

- Direct cooking chamber steam generation system with water injection directly on the fan and nebulization on the heating elements. Advantage: immediate availability of steam in the cooking chamber.

STEAM GENERATION - INDIRECT (WITH STEAM GENERATOR)

- Steam generator heating elements of armoured INCOLOY 800 type.
- Automatic boiler pre-heating.
- Daily automatic boiler draining and rinsing, temperature of drained water below 60°C.
- Alarm in case of boiler de-scaling required.
- Boiler semi-automatic de-scaling program.
- CAL-OUT system to prevent scale build-up within the boiler, as standard.
- New high-performance fully insulated steam generator in AISI 304 stainless steel.

SAFETY FEATURES

- Cooking chamber temperature limiter.
- Cooking compartment safety device for pressure built-up and depression.
- Fan motor thermic protection.
- Door open/closed electronic sensor.
- Electronic control for lack of water alarm.
- Self-diagnosis with smart error viewing.
- Ventilated component cooling system with electronically controlled over-temperature display.
- Steam generator temperature limiter.
- Automatic electronic control of water level in the steam generator during filling and draining.
- Boiler probe to check boiler completely empty.
- Fan motor brake.
- Max 65°C external temperature on the door panel.
- Complies with national and international standards for safe operation in case of use without direct operator supervision - IEC 60335-1 / IEC 60335-2-42.
- Maximum last tray shelf height 160 cm.
- In case of a power failure during washing, hygiene is always guaranteed insofar as the washing cycle is automatically resumed.

CLEANING AND MAINTENANCE

- Manual cleaning system with retractable hand-held shower.
- WMS - Wash Management System. System allowing washing programmes to be planned based on combi use.
- 7 automatic washing programmes without the need for operator input after start-up: Manual - Rinse - Fast - Soft - Medium Eco - Hard Eco - Grill.
- "Fast" ultra-fast washing in 10'. Minimum interruptions to the work cycle and consistently optimal cleaning.
- Easy external cleaning thanks to perfectly smooth surfaces in stainless steel and glass and IPX5 protection against water splashes.
- **VCS - Vapor Cleaning System.** Innovative automatic cleaning system with controlled dosage. The vaporisation of the detergent in the cooking chamber enables a considerable reduction in detergent consumption of up to 30%.
- CombiClean Boosted liquid cleaner in 10 L canister (100% recyclable HDPE). Supplied with canister of CombiBlue (990 g), alkaline cleaning agent for initial oven start-up.
- CALOUT descaling system that prevents the formation and accumulation of limescale in the steam generator (for model with steam generator). Internal housing for descaler cartridge with automatic dispensing (CalFree Boosted liquid descaler, in 100% recyclable cartridges. Supplied with 1 cartridge of liquid descaler - 990 gr.
- CalFree Boosted liquid limescale remover in 10 L canister (100% recyclable HDPE). Supplied in 990 g canister.

INSTALLATION AND ENVIRONMENT

- 100% recyclable packaging.
- LCP - Life cycle perspective: CO2 consumption - 380 Kg CO2 eq/year. The calculation was performed taking mod. _E101B (model with steam generator), taking into account a hypothetical restaurant use and considering 8 hours a day for 3.5 days a week, forty-eight day per year.
- Product recycling rate: 90%.
- Quality ISO 9001 / Safety ISO 45001 / Environmental ISO 14001 certification.
- It is recommended to have the equipment installed by LAINOX accredited Service Centers.
- Operation without adding the water softener and descaler (model with steam generator).
- It is recommended to have periodic maintenance carried out by a LAINOX Service Center in accordance with the manufacturer's recommendations and as stated in the maintenance manual and warranty.

STANDARD EQUIPMENT

- Multipoint core probe \varnothing 3 mm with external connector
- Built-in and retractable hand shower with tap
- CALOUT descaling system for models with boiler. Supplied with anti-scale product
- Wi-Fi connection. Compatible with IEEE 802.11g (2.4GHz) standard
- USB connection
- VCS - Vapor Cleaning System. Innovative automatic cleaning system with controlled dosage.
- Trolley NKS201 - 20 x GN 1/1

OPTIONAL TO BE REQUESTED WHEN ORDERING

OB201E: Steam generator. For electric model

SLS3: Smart lighting system - Chromatic communication

SSB201S: Extra charge for trolley NKS201S - 15 x 1/1 GN - \downarrow 84

SSB154: Extra charge for trolley NKS154 - 15 x EN1 (600 x 400) - \downarrow 89

SLCV: Smart chemical control - For direct steam models

SLCS: Smart chemical control - For steam generator models

NSGB200: Innovative smokegrill for barbecue system

MK201B: Marine version. Kit consisting of: immobilizing door lock, flanged feet, display/control panel protection. Extraction hood and configuration for connection, cannot be installed

LLG: Long Life Gasket - Automatic tracked frame hold and release

KPG201: Chicken grill kit professional

DSP: Display-control panel protection


SSB564P: Extra charge for trolley NKS564P - 5 x EN1 (600 x 400) - \downarrow 250

SN: Extra charge for energy saving system connection. Electric models only

NETH: Extra charge for Ethernet connection

BPK: Configuration for connection to extraction hood

SNCP: Extra charge for energy saving system connection. Electric models only. Exclusive for Power Guardian system

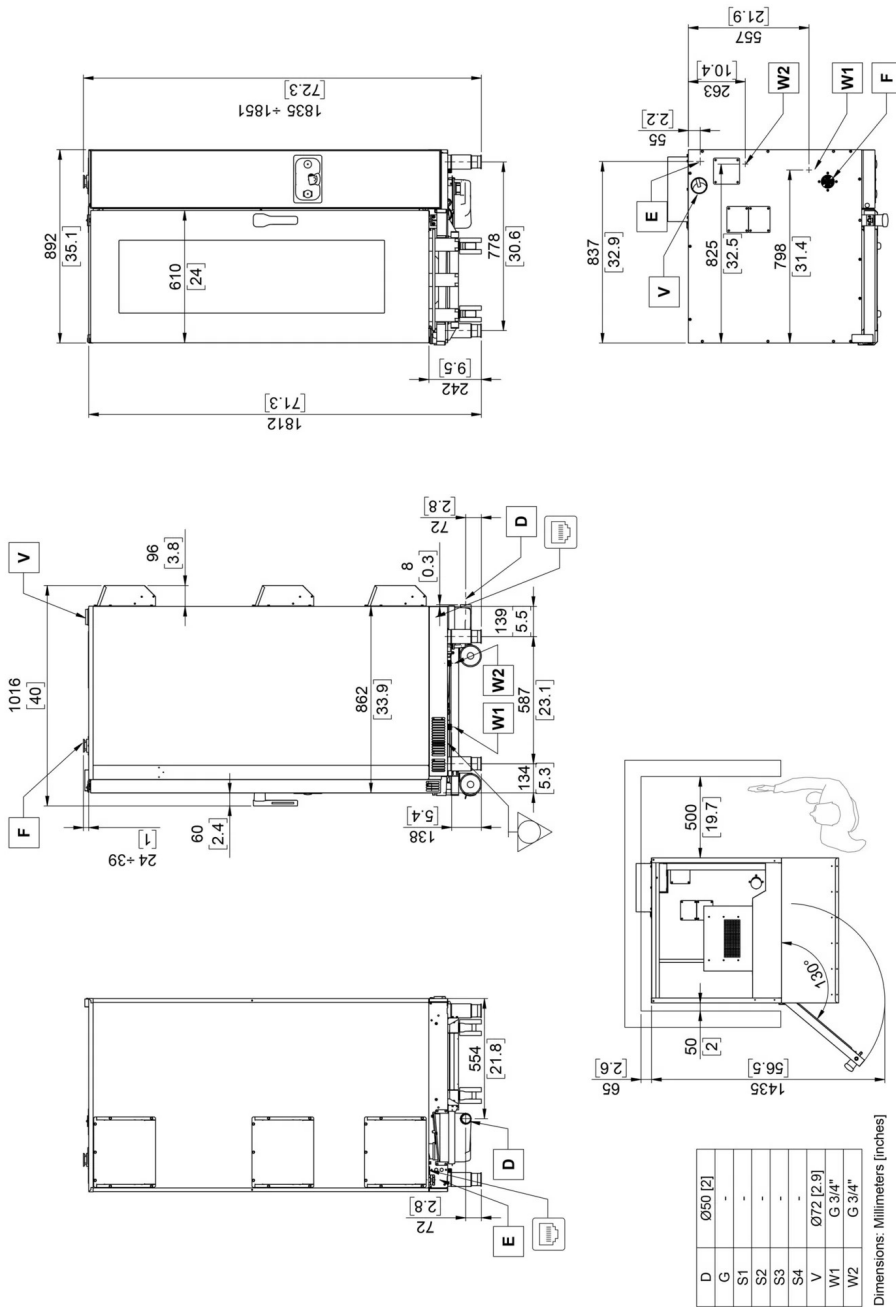

A	Technical compartment cooling air intake	D	Liquid discharge	E	Electric power supply cable inlet	F	Cooking chamber air intake
G	Gas inlet	S1	Cooking chamber fumes exhaust	S2	Cooking chamber fumes exhaust	S3*	Steam generator fumes exhaust
S4*	Steam generator fumes exhaust	V	Steam vent and cooking chamber pressure drop safety device	W1	Water inlet	W2	Softened water inlet
	Equipotential connection		Ethernet connection				

The data reported in this document is to be considered non-binding. The company reserves the right to make changes at any time, without prior notice



LAINOX ALI Group Srl
Via Schiaparelli 15
Z.I. S. Giacomo di Veglia
31029 Vittorio Veneto (TV) · Italy

Tel +39 0438 91110
Fax +39 0438 912300
lainox@lainox.com
www.lainox.com



6/11/2025